



335 - 350 Wp 120 MONOCRYSTALLINE HALF-CUT CELLS

AEG solar modules combine the most advanced technology with high reliability in manufacture to offer you a product meant for high achievements.



OPTIMIZED DESIGN MAXIMUM EFFICIENCY

AEG solar modules with half-cut cells and 9 busbar technology are designed to maximize efficiency and plant performance. The 110 cm extra-long cables allow more installation flexibility and comfort.



CAREFUL SELECTION, PREMIUM LOOK

The careful selection of components (cells, backsheet and frames) ensures a premium product look and provides extra aesthetical value.

COMPREHENSIVELY CERTIFIED

AEG solar modules and production facilities are compliant with the the latest standards to guarantee safety and reliability. Production facilities are certified according to ISO 9001, ISO 14001 and OHSAS 18001. AEG solar products are certified among others by:



YOUR ADVANTAGE AT A GLANCE

Premium solar panel with quality components
High efficiency - up to 350 Wp
Product certified IEC 61215:2016, IEC 61730:2016
15 years Product warranty
25 years linear Power warranty



PHOTOVOLTAIC MODULE AS-M1203-H



ELECTRICAL CHARACTERISTICS AT STC¹

		AS-M1203-H-335	AS-M1203-H-340	AS-M1203-H-345	AS-M1203-H-350
Nominal Power (P _{max})	[Wp]	335	340	345	350
Power Sorting ²	[Wp]	-0 / +5	-0 / +5	-0 / +5	-0 / +5
Maximum Power Voltage (V _{mp})	[V]	34.44	34.69	34.96	35.22
Maximum Power Current (I _{mp})	[A]	9.73	9.80	9.87	9.94
Open Circuit Voltage (V _{oc})	[V]	41.61	41.88	42.16	42.44
Short Circuit Current (I _{sc})	[A]	10.22	10.30	10.38	10.46
Module Efficiency (η _m)		19.8%	20.1%	20.3%	20.6%
Maximum System Voltage	[V]	1000	1000	1000	1000
Series Fuse Maximum Rating	[A]	20	20	20	20


ELECTRICAL CHARACTERISTICS NMOT³

		AS-M1203-H-335	AS-M1203-H-340	AS-M1203-H-345	AS-M1203-H-350
Maximum Power (P _{max})	[W]	2498	2535	2573	2610
Maximum Power Voltage (V _{mp})	[V]	32.10	32.35	32.59	32.83
Maximum Power Current (I _{mp})	[A]	7.78	7.84	7.89	7.95
Open Circuit Voltage (V _{oc})	[V]	39.12	39.37	39.64	39.90
Short Circuit Current (I _{sc})	[A]	8.22	8.28	8.35	8.41

MECHANICAL CHARACTERISTICS

Solar cells	120 [(6 x 10) x 2] monocrystalline silicon, 158.75 x 78 mm half-cut cells
Front glass	3.2 mm (0.12") high-transparency
Backsheet	White backsheet
Encapsulant	EVA (Ethylene-Vinyl Acetate)
Frame	Anodized aluminum alloy, silver or black color („zebra“)
Junction box	IP67, 3 bypass diodes
Cables	UV resistant cable 110 cm (43.3"), sec.4.0 mm ²
Connectors	MC4 compatible connectors
Dimensions	1692 mm x 1002 mm x 35 mm (66.6" x 39.4" x 1.38")
Weight	19.1 kg (42.1 lbs)
Maximum load	Wind: 2400 Pa / Snow: 5400 Pa

TECHNICAL DRAWINGS

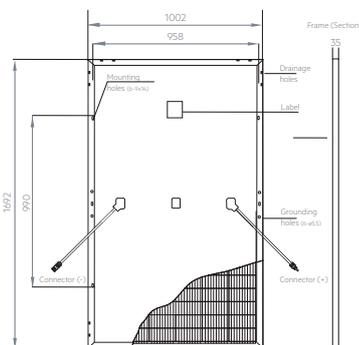

Module dimensions in the technical picture are expressed in mm with tolerance ±2 mm (+0.079")

1- Standard Test Conditions (STC): Irradiance 1000 W/m²; Air Mass AM = 1.5; Cell Temperature 25°C; Tolerance on P_{max} ± 3%; Tolerance on V_{oc} ± 3%; Tolerance on I_{sc} ± 5%

2- AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power at STC within a power tolerance range between -0 Wp and +5 Wp.

3- Nominal Module Operating Temperature (NMOT): Irradiance 800 W/m²; Wind Speed 1m/s; Ambient Temperature 20°C; Air Mass AM=1.5)

4- No less than 98% of the minimum "Peak Power at STC" in the first year; power output decline no more than 0.55% per year thereafter). Full text of the Warranty Terms available at: www.aeg-industrialsolar.de

© Solar Solutions GmbH. Specifications in this datasheet are subject to change without notice. Code: AS-M1203-H-KM0N1-98B-335-350 / version 2020.08.V2.EN

AEG is a registered trademark used under license from AB Electrolux (publ).

TEMPERATURE CHARACTERISTICS

NOCT	44°C ± 2°C
P _{max} Temp. Coefficient (γ)	-0.34 %/C
V _{oc} Temp. Coefficient (β)	-0.27 %/C
I _{sc} Temp. Coefficient (α)	0.04 %/C
Operating temperature	-40°C to + 85°C

PACKING CONFIGURATION



Packing configuration	31 pcs / pallet
Loading capacity	806 pcs / 40 ft HC

WARRANTIES

Product warranty	15 years
Performance warranty	25 years, linear ⁴

I-V CURVES / IRRADIANCES

Test temperature: 25 °C

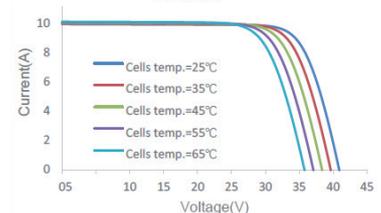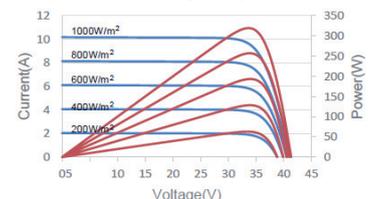

CONTACT US

Solar Solutions GmbH | Brückenstrasse 94 | 60594 Frankfurt am Main | Germany

Tel: +49 69 400 500 810 | Fax: +49 69 400 500 819 | Mail: info@aeg-industrialsolar.de

www.aeg-industrialsolar.de