


AEG

AEG HIGH EFFICIENCY SERIES

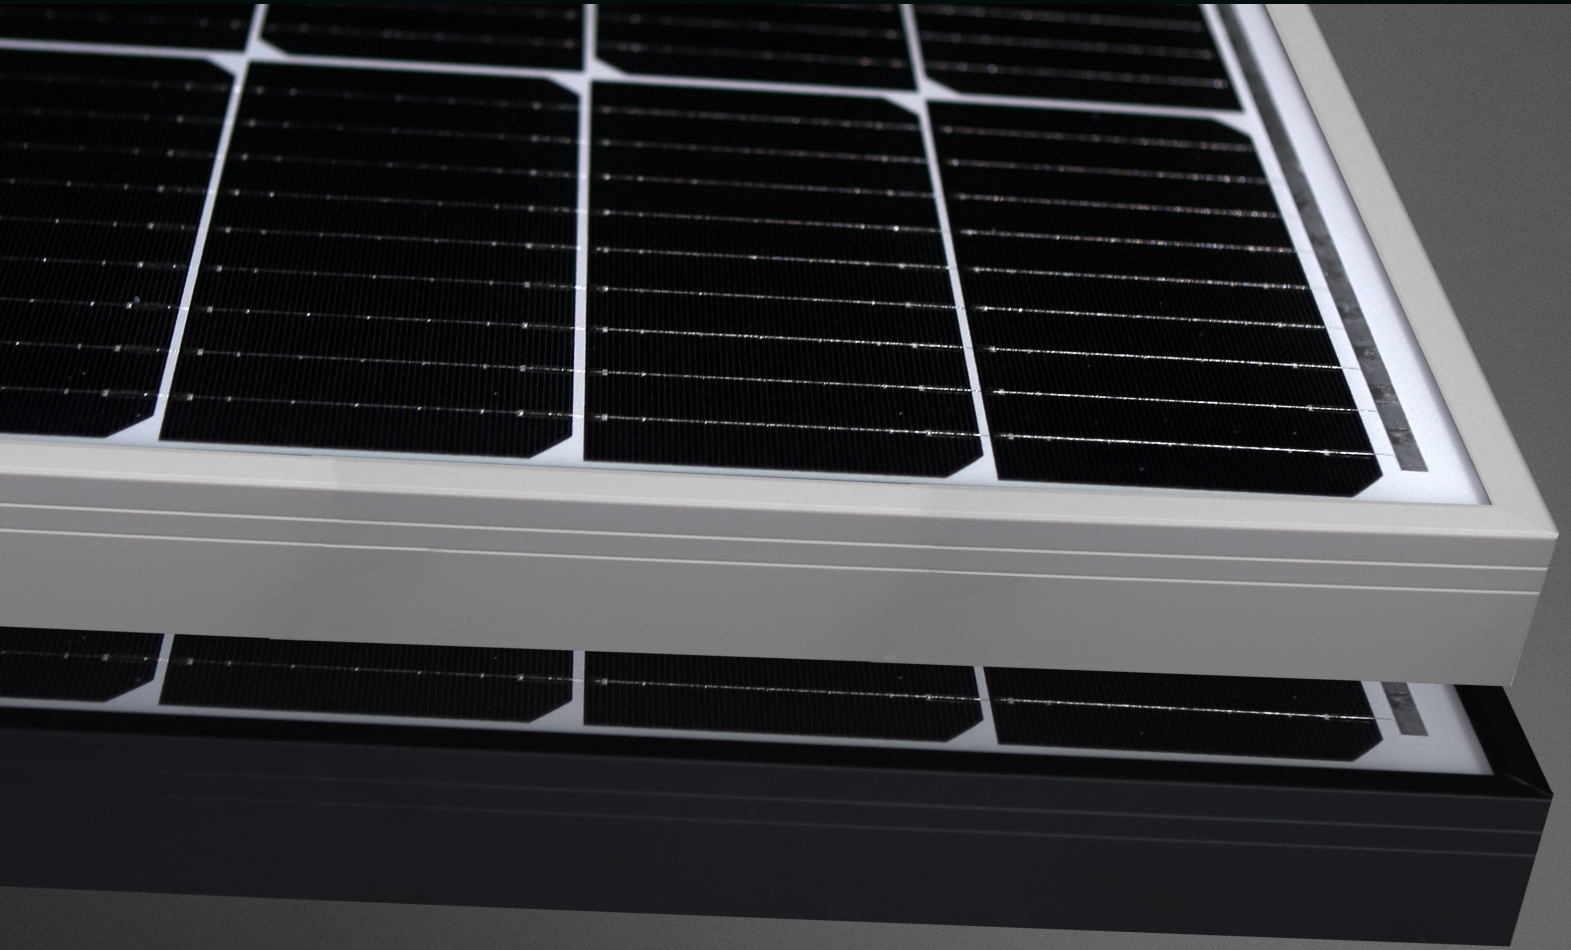

AS-M1202-H(M6) / HALF-CUT CELLS PHOTOVOLTAIC MODULE

CHARACTERISTICS



Power range: 370-380 Wp
Half-Cut-cell technology
Suitable for: residential / commercial installations

PRODUCT NAME CODE (PNC)



AS-M1202-H(M6)-370/375/380
(silver frame, white backsheet)
AS-M1202Z-H(M6)-370/375/380
(black frame, white backsheet)

EXTRA PEACE OF MIND



Extensive certifications and rigorous Quality Control
15 years product warranty
25 years performance warranty

ADVANTAGES



More converting surface, more energy outputs
Outstanding sleek optics
Extra long cables for greater installation flexibility

AS-M1202-H(M6) / HALF-CUT CELLS PHOTOVOLTAIC MODULE

PRODUCT SERIES & NAMECODE (PNC)	
AEG HIGH EFFICIENCY SERIES	
AS-M1202-H(M6)-370/375/380	silver frame, white backsheet
AS-M1202Z-H(M6)-370/375/380	black frame, white backsheet

ELECTRICAL CHARACTERISTICS AT STC ^{1,2}				
Nominal Power (Pmax)	[Wp]	370	375	380
Power Sorting ³	[W]	-0/+5	-0/+5	-0/+5
Maximum Power Voltage (Vmp)	[V]	33.95	34.10	34.24
Maximum Power Current (Imp)	[A]	10.91	11.01	11.11
Open Circuit Voltage (Voc)	[V]	41.72	41.89	42.06
Short Circuit Current (Isc)	[A]	11.32	11.43	11.52
Module Efficiency (ηm)	[%]	20.31	20.59	20.86
Maximum System Voltage	[V]	1000	1000	1000
Series Fuse Maximum Rating	[A]	20	20	20

ELECTRICAL CHARACTERISTICS AT NOCT ⁴				
Maximum Power (Pmax)	[W]	298	302	306
Maximum Power Voltage (Vmp)	[V]	33.86	34.01	34.15
Maximum Power Current (Imp)	[A]	8.81	8.89	8.97
Open Circuit Voltage (Voc)	[V]	41.38	41.54	41.71
Short Circuit Current (Isc)	[A]	9.02	9.10	9.18

MECHANICAL CHARACTERISTICS		
Solar cells	monocrystalline [pcs]	120
	Dimensions [mm]	M6 Half-cut [166 x 83]
Front glass	high-transparency	
	Thickness [mm] / [in]	3.2 / 0.126
Backsheet	White	
Encapsulant	EVA	
Frame	Anodized aluminum alloy	Silver or black
Junction box	Split-type, IP68	
	Bypass diodes	3
UV-resistant cables	Length [mm] / [in]	1400 / 55.12
	Section [mm ²]	4
Connectors	MC4	
Dimensions	H x L x W [mm]	1755 x 1038 x 35
	H x L x W [in]	69.09 x 40.86 x 1.37
Weight	[kg] / [lbs]	21.0 / 46.3
Maximum load	Wind / Snow [Pa]	2400 / 5400
Fire Class	Class C	



PACKAGING		
Packing configuration	[pcs/pallet]	31
Loading capacity	[pcs/40 ft container]	806

NOTES	
1-Standard Test Conditions (STC): Irradiance 1000 W/m ² , Air Mass AM = 1.5, Cell Temperature 25°C	
2-Measurement tolerances (IEC 61215:2016): Pmax±3%, Voc±3%, Isc±4%	
3-Electrolux photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power	
4-NOCT: Nominal operating cell temperature, Irradiance 800 W/m ² , Wind Speed 1m/s; Ambient Temperature 20°C, Air Mass AM=1.5	
5-Full text of the Warranty Terms available at: www.aeg-industrialsolar.de . The Extended Warranty is a separate offer. If not offered by your distributor, the standard warranty conditions apply.	
6-(H/E/GB) No less than 98% of the minimum *Peak Power at STC* in the first year; power output decline no more than 0.55% per year thereafter, ending with 84.8%.	
Dimensions in the technical picture are expressed in mm with tolerance ±2 mm (=±0.079") / Version 2022.11.V1 EN © Solar Solutions Group. Specifications in this datasheet are subject to change without notice.	
AEG is a registered trademark used under license from AB Electrolux (publ).	

CERTIFICATIONS	
System	ISO 9001, ISO 14001, ISO 45001
Product	IEC 61215-1:2016, IEC 61215-4:2016, IEC 61215-2:2016, IEC 61730-1:2016, EN 61215-1:2016, EN 61215-1:2016, EN 61215-2:2017, EN IEC 61730-1:2016, EN IEC 61730-1:2016/AC:2018-06

WARRANTIES		
Product warranty ⁵	[years]	15
Performance warranty (linear) ⁶	[years]	25

TEMPERATURE CHARACTERISTICS		
NMOT	[°C]	42 (±3)
Pmax Temp. Coefficient (γ)	[%/°C]	-0.328
Voc Temp. Coefficient (β)	[%/°C]	-0.256
Isc Temp. Coefficient (α)	[%/°C]	0.0487
Operating temperature	[°C]	-40~+85

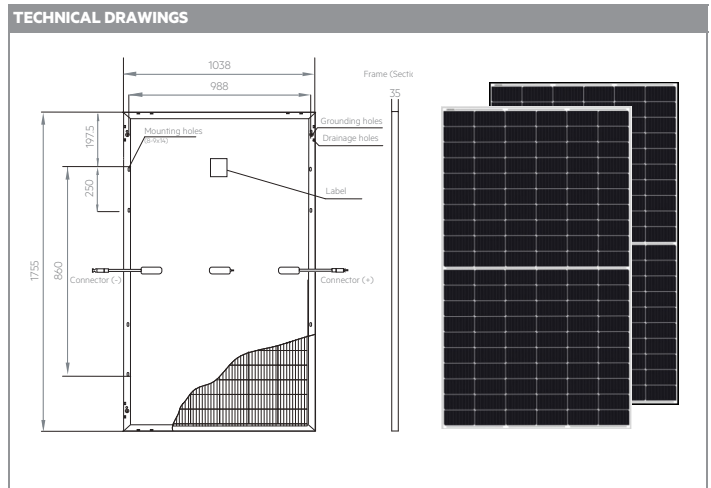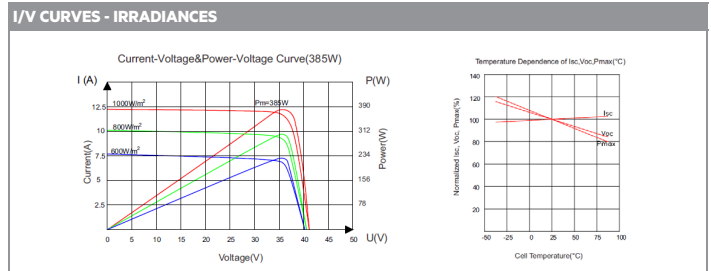

CONTACT US

info@aeg-industrialsolar.de | www.aeg-industrialsolar.de

AEG is a registered trademark used under license from AB Electrolux (publ)